

ASM-350

Digital Pressure Gauge Controller

- Low pressure type (-100~+100KPa)
- High pressure type (-0.1~+1MPa)
- 3-color digital LCD display
- Indicator accuracy < 1% F.S.
- Power supply 12~24VDC ± 10%
- Output 4~20mA or 1~5V
- Application : non-ionic, non-corrosive gas
- Programmable units: Kpa,Mpa,bar,psi,kgf/cm²



TECHNICAL SPECIFICATION

ASM-350		-01P	-01C	-10P	-10C	-15P	-15C
		High pressure	Low pressure	High pressure	Low pressure	High pressure	Low pressure
Rated pressure range		-0.101~1.000MPa	-101.3~101.3kPa	-0.101~1.000MPa	-101.3~101.3kPa	-0.101~1.000MPa	-101.3~101.3kPa
Set pressure range		-0.100~1.000MPa	-101.0~101.0kPa	-0.100~1.000MPa	-101.0~101.0kPa	-0.100~1.000MPa	-101.0~101.0kPa
Withstand pressure		1.5MPa	500kPa	1.5MPa	500kPa	1.5MPa	500kPa
Fluid		Filtered air, Non-corrosive / Non-flammable gas, conform to ISO8573-1:2010 [7:4.4]					
Power supply		12~24V DC ± 10%					
Current consumption		< 45mA(without load)					
Set pressure resolution	kPa	—	0.1	—	0.1	—	0.1
	MPa	0.001	—	0.001	—	0.001	—
	kgf/cm ²	0.01	0.001	0.01	0.001	0.01	0.001
	bar	0.01	0.001	0.01	0.001	0.01	0.001
	psi	0.1	0.01	0.1	0.01	0.1	0.01
	mmHg	—	0.1	—	0.1	—	0.1
	inchHg	—	1	—	1	—	1
Switch output compare [NOTE] *1		2NPN : open collector 2 outputs Max. Load Current : 100 mA Max. Supply Voltage : 30 V DC Residual Voltage : ≤ 1.5 V*		2PNP : open collector 2 outputs Max. Load Current : 100 mA Max. Supply Voltage : 24 V DC Residual Voltage : ≤ 1.5 V*			
Analog Output (Voltage Output) [NOTE] *1		No		Output Voltage: 1~5V ±2.5% F.S. Linearity: ±1% F.S. Output Impedance: about 1KΩ		No	
Analog Output (Current Output) [NOTE] *1		No		Output Current: 4~20 mA ±2.5% F.S. Linearity: ±1% F.S. Output Impedance: about 1KΩ Max.Load Impedance: 300Ω		No	
MODBUS function [NOTE] *2		No				YES	
Indicator accuracy		±1% F.S. ±1 digit (ambient temperature : 25 ±10 °C)					
Repeatability		±0.2%F.S. ±2digits					
Response time		2.0ms, 50ms, 100ms, 250ms 500ms,2000ms option1 [Note] *1		1ms [Note] *1 2.0ms, 50ms, 100ms, 250ms 500ms,2000ms option1		2.0ms, 50ms, 100ms, 250ms 500ms,2000ms option1 [Note] *4	
Display		3 colors(Red,Orange, Yellow-green) display(Sampling rate : 4 times / sec.)					
Indicator accuracy		< 1% F.S.(ambient temperature : 25 °C)					
Working environment		0~50°C (No condensation or freezing); 35~85%RH (No condensation or freezing)					
Storage environment		-10~50°C (No condensation or freezing); 35~85%RH (No condensation or freezing)					
IP class		Ip40 / IP65*					
Port size		R.R1/8-M5 G.G1/8+M5 N.NPT1/8+M5					
Net weight		about 80g(including cable)					
Accessory		with 1 cable					

MODEL SELECTING GUIDE

ECONOMIC SERIES

ASM-350 01 C 001 R

① ② ③ ④

① Series	01 : Economic		
② Pressure Range	C : -101.3~101.3kPa (Low pressure)		P : -0.101~1MPa (High pressure)
③ Output	001 : 2NPN 002 : 2PNP	003 : 1NPN+1Analog(1~5V) 004 : 1PNP+1Analog(1~5V)	
④ Port	R : R1/8,M5	G : G1/8,M5	N : NPT1/8,M5

Standard Series

ASM-350 10 C 010 R

① ② ③ ④

① Series	10 : Standard 20 : High protection grade (IP65)		
② Pressure Range	C : -101.3~101.3kPa (Low pressure)		P : -0.101~1MPa (High pressure)
③ Output	010 : 2NPN+1Analog(1~5V) 020 : 2PNP+1Analog(1~5V)	011 : 2NPN+1Analog(4~20mA) 021 : 2PNP+1Analog(4~20mA)	
④ Port	R : R1/8,M5	G : G1/8,M5	N : NPT1/8,M5

Communicative Series

ASM-350 15 C 030 R


① ② ③ ④

① Series	15 : Normal grade		
② Pressure Range	C : -101.3~101.3kPa (Low pressure)		P : -0.101~1MPa (High pressure)
③ Output	030 : 1NPN+1RS485 031 : 1PNP+1RS485		
④ Port	R : R1/8,M5	G : G1/8,M5	N : NPT1/8,M5


Optinal Parts for purchasing separately

1. Metal mounting bracket - L style: XP-BT-01
2. Metal mounting bracket - Z style: XP-BT-02
3. Panel adapter(have protective lid): XP-PA-01
4. Cable - 3 wires: XP-CA-01
5. Cable - 5 wires: XP-CA-02

□ PANEL DESCRIPTION

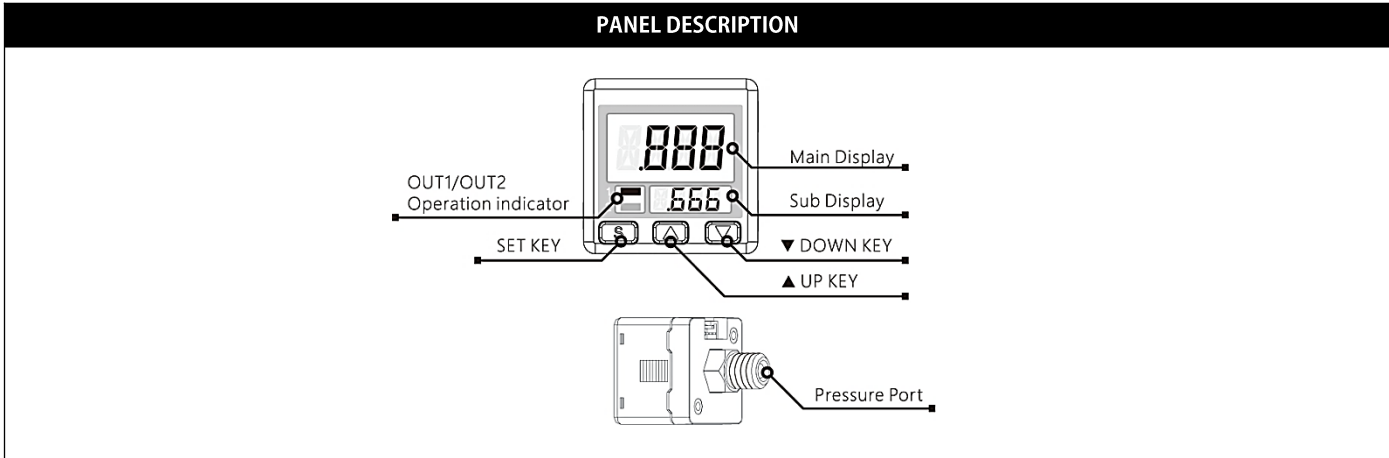

□ Dimensions

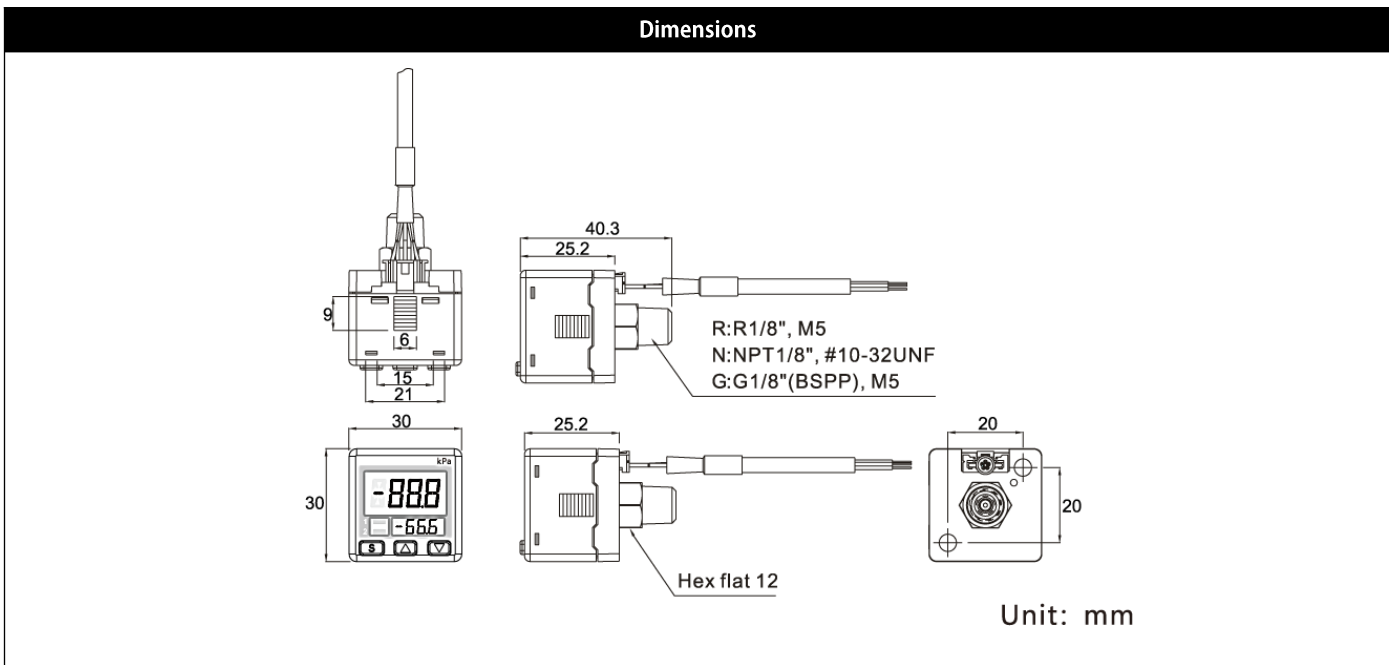

□ Setting Info.

: Please refer to the manual supplied with the product.

□ History of document

Document#	DATE	Description
Rev1.0	2019.12.03	First Release.

DISCLAIMER

We hereby expressly disclaims any liability of us to any customer, licensee or any other third party, and any such customer, licensee and any other third party hereby waives any liability of us for any damages in connection with or arising out of the furnishing, performance or use of this technical data, whether based on contract, warranty, tort (including negligence), strict liability, or otherwise. This datasheet is applies to a product under development. Its characteristics and specifications are subject to change without notice and we assumes no obligation regarding future manufacture unless otherwise agreed to in writing. However, under no circumstances shall us be liable to any customer, licensee, or any other third party for any special, indirect, incidental, or consequential damages of any kind or nature whatsoever arising out of or in any way related to the furnishing, performance, or use of this technical data.